



nosstec

BENDING ROLL MACHINE 4126


Our smallest machine suitable for production of small products. Manually operated with centerless ground rolls dia. 25 to 45 mm. The sides are made of anodized and solid aluminium. The setting of the bottom and bending rolls is carried out by means of hand wheels. The bending roll can also be set diagonally for cone bending.

- ▶ Top roll can be swung out
- ▶ Cone bending as standard
- ▶ Light duty production



Stand

MANUAL

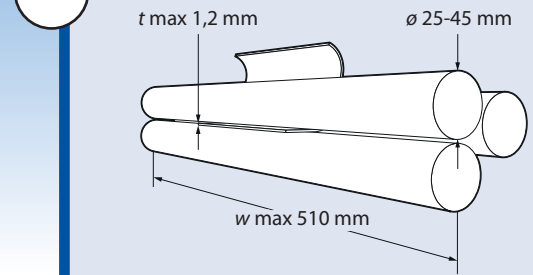

Art.no.	4126	-0208	-0209	-0306	-0307	-0310	-0312	-0508	-0509
Capacity		2/08	2/09	3/06	3/07	3/10	3/12	5/08	5/09
Working length (w)	mm	210	210	360	360	360	360	510	510
Max sheet thickness (400N/mm ²) (t)	mm	0,8	0,9	0,6	0,7	1,0	1,2	0,8	0,9
Diameter of rolls (ø)	mm	25	30	25	30	40	45	40	45
Net weight	kg	13	16	15	19	23	27	29	33
OPTIONS:									
Stand	4126	-0902	-0902	-1009	-1009	-1009	-1009	-1108	-1108

Nosstec AB, Kristineholmsvägen 12, 441 39 Alingsås, SWEDEN

Tel: +46 (0)512 - 298 85 • Fax: +46 (0)512 - 298 89 • E-mail: info@nosstec.se • Web: www.nosstec.se

For copyright reasons all reproduction and copying of the texts, photos, tables and illustrations is prohibited without written permission from Nosstec AB.